
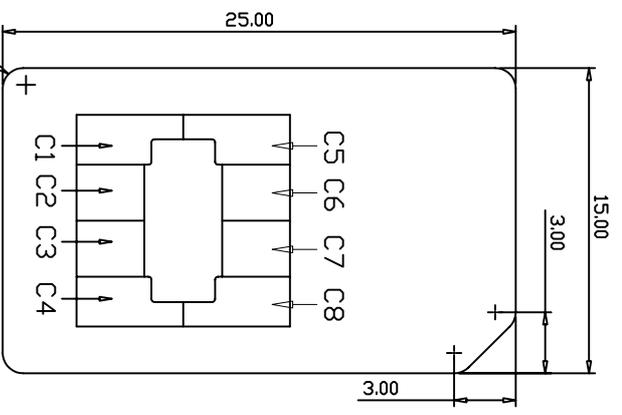
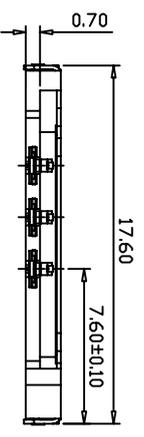


REV. A	DATE 2015/12/16	ECN NO. /	MODIFICATION NEW	APPROVER Vicky
--------	-----------------	-----------	------------------	----------------

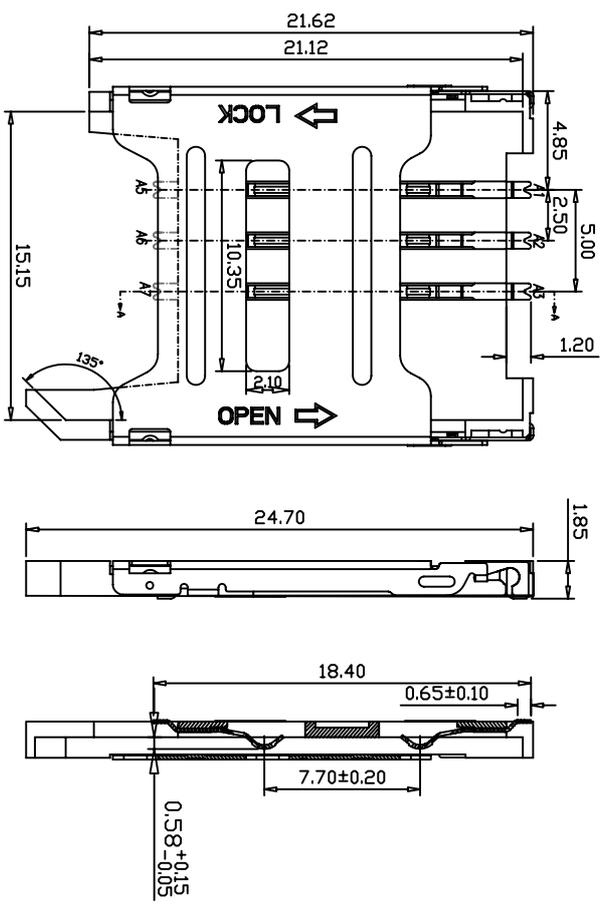

PIN NO.	PIN NAME
A1	VCC
A2	RST
A3	CLK
A4	Reserved
A5	GND
A6	VPP
A7	I/O
A8	Reserved

NOTES:

- SPECIFICATIONS
 INSULATION RESISTANCE: 1000MΩ min. AT DC 500V DC
 WITHSTANDING VOLTAGE: 500V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100m Ohm max.
 CURRENT RATING: 1 A
 VOLTAGE RATING: 250 Volts AC(rms.) Max
 OPERATING TEMP. RANGE: -30°C~+80°C
 MATING CYCLES: 5000 INSERTIONS
- MATERIAL:
 Housing: LCP, UL 94V-0, COLOR"BLACK"
 TERMINAL: COPPER ALLOY
 SHELL: STAINLESS STEEL
 LATCH: STAINLESS STEEL
- FINISH:
 TERMINAL: 50μ" min NICKEL UNDERPLATED ON ALLOYER, GOLD
 PLATING ON CONTACT AREA, Sn ON SOLDER TAIL.

GENERAL TOLERANCE			UNITS mm		NAME: SIM CARD	
SELECT	✓				PART NO:	S146C-03200
TOL	1	2	3		APPD:	Vicky
X.XXX	±0.05	±0.05	±0.15		CHKD:	Doris
X.XX	±0.15	±0.13	±0.25		DR:	Cmy
X.X	±0.25	±0.25	±0.50		TITLE: SIM CARD 2.5mm 6P H=1.8mm 掀盖式 加耳扣	
X.		±0.38	±1.00		DWG NO. ATDM-A02894	
ANGLE	±1°				SCALE	1:1
					SHEET	1/1
					REV	A