

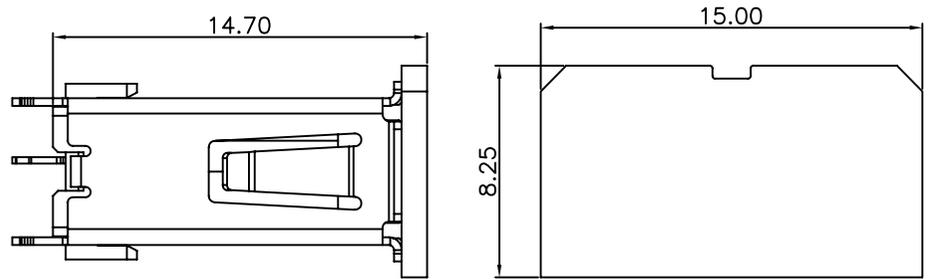
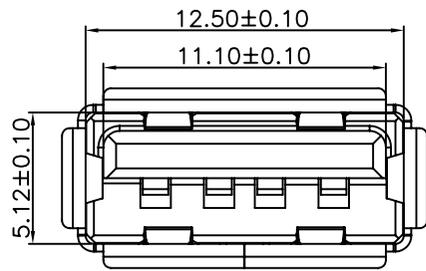
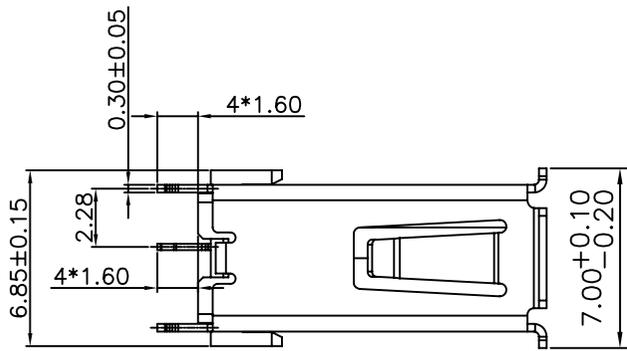


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2016/12/20		NEW	Jason

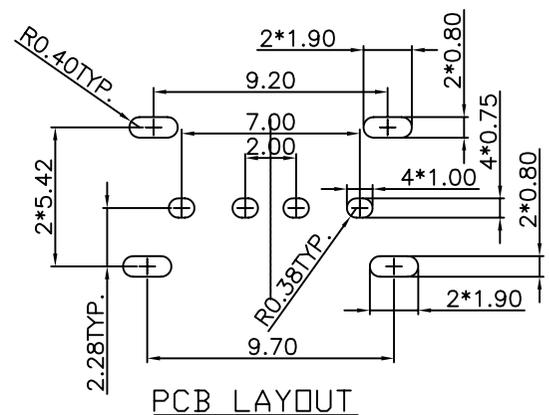

成品加后塞示意图

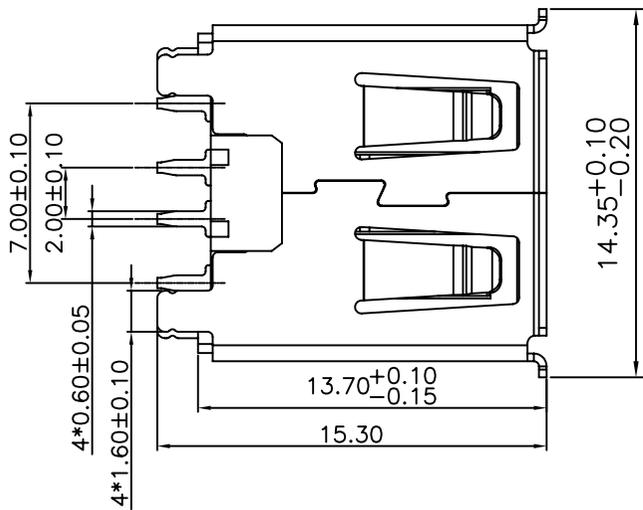

Specifications:

Electrical:

- 1.Current Rating:2.1A/contact terminal
- 2.Voltage Rating:30V DC
- 3.Contact Resistance:30 milliohms Max
- 4.Dielectric Withstanding Voltage: 500V AC AT Sea Level
- 5.Insulation Resistance:1000MEGA ohms MIN

Material:

- 1.Housing:LCP UL94V-0
- Color:Black

Contact:Copper Alloy

Shell:SUS304

Finish:

- Contact:Plated Gold in Mating Area;
- Tin on Solder Tails

Shell:Nickel plating

GENERAL TOLERANCE				UNITS	NAME:
SELECT	✓			mm	USB A/F 4P DIP
TOL.	1	2	3	MAT'L	PART NO:
X.XXX	±0.15	±0.05	±0.15		USB304FA-B1035202
X.XX	±0.25	±0.13	±0.25	FINISH	TITLE: USB A/F 4P DIP 180° 短体直脚 L=13.7
X.X	±0.30	±0.25	±0.50		APPD: Jason
X.	±0.38	±0.38	±1.00	Q'TY	CHKD: Vicky
ANGLE	±5°				DR: JACK
					DWG NO. ATOM-A03285
					SCALE SHEET REV
					1:1 1/1 A